


Jetty Positions

(update february 2020)

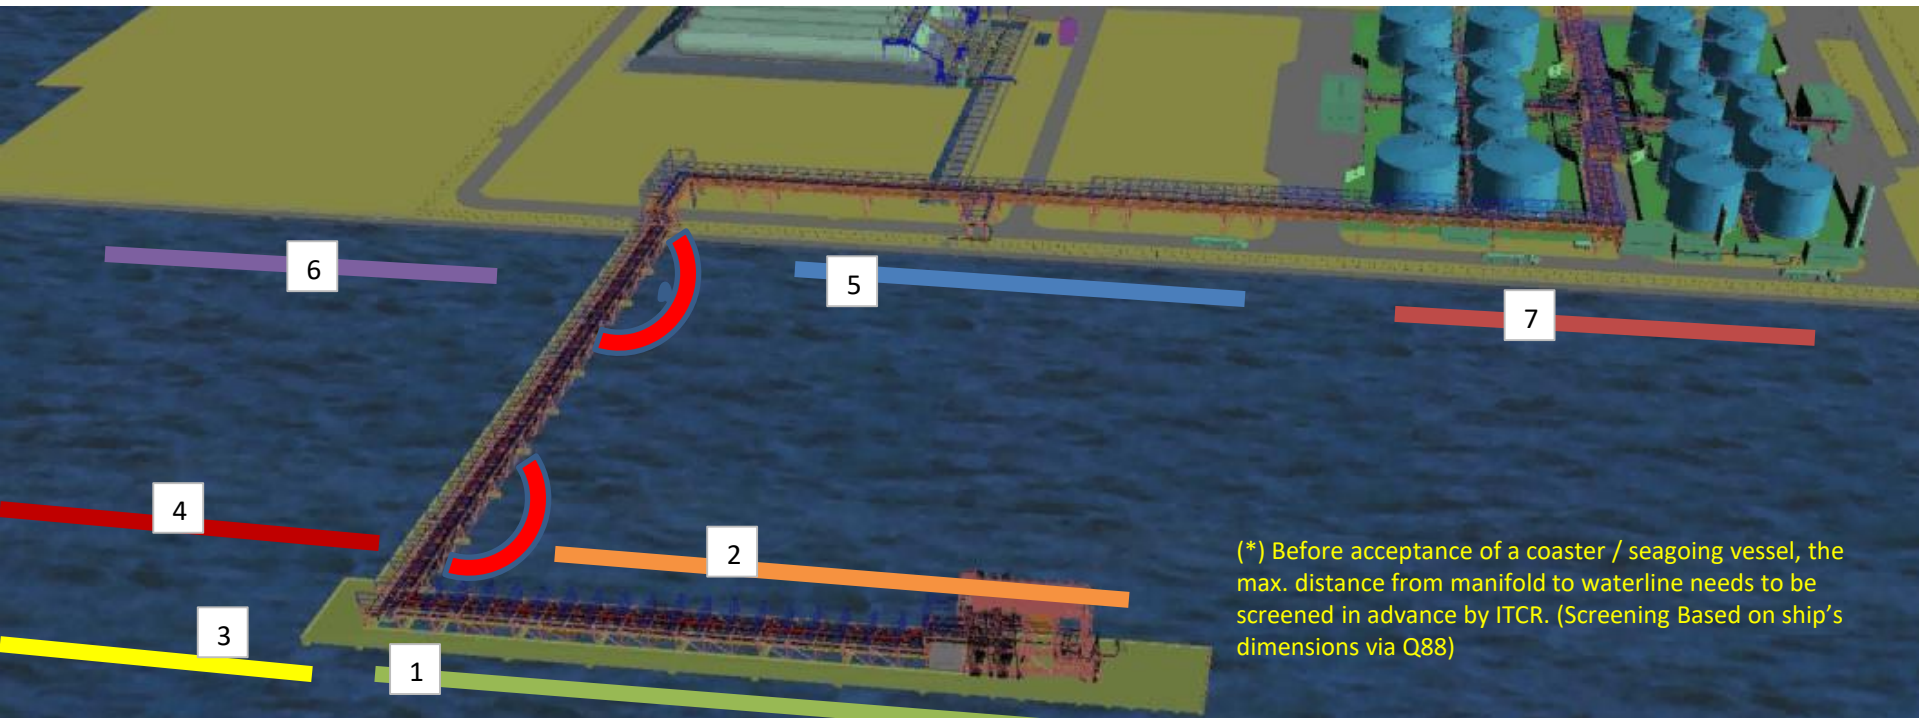

(*) Before acceptance of a coaster / seagoing vessel, the max. distance from manifold to waterline needs to be screened in advance by ITCR. (Screening Based on ship's dimensions via Q88)

Position	Port no.	Timing	Max. LOA	Max. Beam	Max. DWT	Max. Draft	Type
1	1666	Phase-I	270 m	47 m	125,000	15.4 m (*)	seagoing vessels, coasters and barges
2	1664	Phase-I	187 m	32 m	50,000	15.4 m (*)	seagoing vessel, coasters and barges
3	1668	Phase-II	274 m	50 m	167,555	15.4 m (*)	seagoing vessels, coasters and barges
4	1670	Phase-II	liquids: 200 m gas: 180 m	liquids: 40 m gas: 29 m	liquids: 65,000 gas: 38,500	liquids: 15.4 m (*) gas: 12.65 m	seagoing vessels, coasters and barges
5	1662	Phase-I	135 m	18 m	10,000	6.2 m (*)	coasters and barges
6	1672	Phase-II	135 m	24 m	16,000	8.7 m	coasters and barges
7	1660	Phase-I	135 m	17 m	10,000	6.2 m (*)	coasters and barges